


缓冲密封件

D-10 Type

材质：TPU/8L95+PA
硬度：95 Shore A
工作温度：-20℃ ~ 100℃

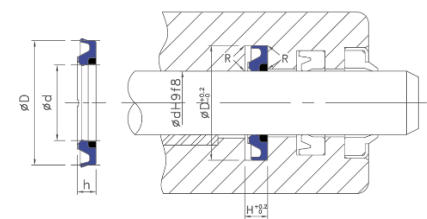

R ≤ 0.3
活塞杆表面应作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa) 的抛光。

Type	Ø d	Ø D	h	H
D-10	22	32.7	4	4.3
	28	38.7	4	4.3
	40	55.5	6	6.3
	45	55.7	3.9	4.2
	45	60.5	6	6.3
	50	65.5	6	6.3
	55	70.5	6	6.3
	56	71.5	6	6.3
	60	75.5	6	6.3
	63	78.5	6	6.3
	65	80.5	6	6.3
	70	85.5	6	6.3
	75	90.5	6	6.3
	80	95.5	6	6.3
	85	100.5	6	6.3
	90	105.5	6	6.3
	95	110.5	6	6.3
	100	115.5	6	6.3
	105	120.5	6	6.3
	110	125.5	6	6.3
	115	130.5	6	6.3
	120	135.5	6	6.3
	124	139.5	6	6.3
	125	140.5	6	6.3
	130	145.5	6	6.3
	135	150.5	6	6.3
	140	155.5	6	6.3
	150	165.5	6	6.3

Type	Ø d	Ø D	h	H
D-10	155	170.5	6	6.3
	160	175.5	6	6.3
	170	185.5	6	6.3
	180	195.5	6	6.3

缓冲密封件

[illegible][illegible]