


活塞杆专用密封件

D-2 Type

材质：TPU / 8L95
硬度：95 Shore A
工作温度：-20°C ~ 100°C

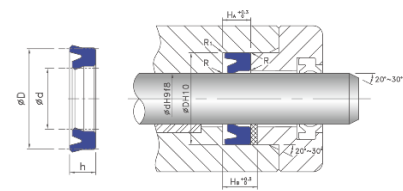

$R \leq 0.3, R1 \leq 0.5$
活塞杆表面应作 $0.8 \sim 1.6 \mu mR_{max}$ ($0.2 \sim 0.4 \mu mR_a$) 的抛光。

Type	Ø d	Ø D	h	HA
D-2	6	12	5	5.6
	9	14	4	4.5
	10	16	4.5	5.2
	10	20	8	9
	11.2	16.2	4	4.5
	11.3	16	3.5	4.5
	12	20	5.8	6.3
	12	22	8	9
	14	22	5	5.7
	14	22	5.7	6.3
	14	24	6	7
	15	21	5	5.7
	15	23	5	5.7
	16	22	5	5.7
	16	24	5	5.7
	16	24	5.7	6.3
	17	25	10	11
	18	26	5	5.7
	18	26	6	7
	18	26	8	9
	18	28	8.2	9.2
	19	27	6	7
	20	25	5	5.7
	20	26	5	5.7
	20	27	6	7
	20	28	5	5.7
	20	28	7.2	8
	20	30	6	7

Type	Ø d	Ø D	h	HA
D-2	20	30	8	9
	20	33	10	11
	21	29.5	5	5.7
	22	30	5	5.7
	22	30	8	9
	22.4	30	5.2	5.7
	22.7	33	5.3	6
	23	35	6	7
	25	32	5	5.7
	25	33	5	5.7
	25	33	5.8	6.3
	25	33	10	11
	28	35.5	5	5.7
	28	36	8	9
	28	38	10	11
	30	38	5.7	6.3
	30	38	7	8
	30	40	6	7
	30	40	7	8
	30	42	12	13
	30	43	10	11
	30	45	9	10
	30	47	7	8
	30	48	7	8
	32	40	5.7	6.3
	32	40	6	7
	32	40	8	9
	32	42	6	7

活塞杆专用密封件

Type	Ø d	Ø D	h	HA
D-2	32	45	6	7
	32	45	10	11
	32	47	10	11
	32	48	10	11
	33	43	10	11
	35	42	7	8
	35	43	6.3	7
	35	45	6	7
	35	45	7	8
	35	45	8	9
	35	45	10	11
	35	46	8	9
	35	46	10	11
	35	50	9	10
	35.5	45	6.5	7.5
	36	44	5.7	6.3
	36	46	10	11
	37	47	6	7
	38	48	6	7
	38.08	57.15	12.7	13.9
	39	58	10	11
	40	47	6	7
	40	50	5	5.7
	40	50	6	7
	40	50	7	8
	40	55	9	10
	40	55	10	11
	42	52	7.3	8
	42	58	13	14
	45	53	10	11
	45	55	5.7	6.3
	45	55	6	7
	45	55	6.5	7.5
	45	55	7	8
	45	55	8	9
	45	58	10	11

Type	Ø d	Ø D	h	HA
D-2	45	60	9	10
	45	60	10	11
	45	60	12	13
	48	58	10	11
	48	63	9	10
	50	60	6	7
	50	60	7	8
	50	60	8	9
	50	63	8	9
	50	63	10	11
	50	65	9	10
	50	65.5	6	7
	52	62	10	11
	53	70	9	10
	55	63	12	13
	55	65	6	7
	55	65	7	8
	55	68	10	11
	55	70	9	10
	55	75	12	13
	56	70	11.5	12.5
	57	84	16	17
	57.15	73.03	9.7	10.5
	60	68	6.3	7
	60	70	6	7
	60	70	7.5	8.5
	60	70	10	11
	60	70	12	13
	60	73	10	11
	60	75	9	10
	60	76	10	11
	60	80	12	13
	63	73	12	13
	63	78	12	13
	63.45	76.25	9.5	10.5
	65	75	6	7

活塞杆专用密封件

Type	Ø d	Ø D	h	HA
D-2	65	75	8	9
	65	78	10	11
	65	80	9	10
	65	80	12	13
	65	85	12	13
	67	84	16	17
	70	80	6	7
	70	82	8.7	9.6
	70	83	10	11
	70	83	13	14
	70	85	9	10
	70	90	10	11
	70	90	12	13
	72	87	9	10
	75	85	6	7
	75	85	7	8
	75	88	10	11
	75	90	9	10
	75	95	10	11
	75	95	12	13
	75	95	13	14
	76.5	90.5	10	11
	77	87	12	13
	80	90	8	9
	80	93	10	11
	80	93	13	14
	80	95	9	10
	80	95	10	11
	80	100	12	13
	85	93	11	12
	85	100	9	10
	85	100	10	11
	85	100	13	14
	85	105	12	13
	85	105	13	14
	86	102	16	17

Type	Ø d	Ø D	h	HA
D-2	90	98	6.3	7
	90	100	13	14
	90	102	8.7	9.6
	90	105	9	10
	90	105	10	11
	90	110	12	13
	90	110	13	14
	95	110	9	10
	95	110	10	11
	95	110	12	13
	95	110	13.5	14.5
	95	115	12	13
	95	115	13.5	14.5
	97	105	13	14
	98	113	9	10
	99	109	12	13
	100	113	12.5	13.5
	100	115	9	10
	100	115	10	11
	100	115	13.5	14.5
	100	120	12	13
	105	113	11	12
	105	120	9	10
	105	125	12	13
	110	120	6	7
	110	125	9	10
	110	125	10	11
	110	130	10	11
	110	130	12	13
	110	130	13	14
	112	125	9	10
	115	127	14	15
	115	130	9	10
	115	135	12	13
	115	135	16	17
	118	133	9	10

活塞杆专用密封件

[illegible][illegible]

活塞杆专用密封件

[illegible][illegible]