


活塞杆专用密封件

D-3 Type

材质：TPU / 8L95
硬度：95 Shore A
工作温度：-20℃ ~ 100℃

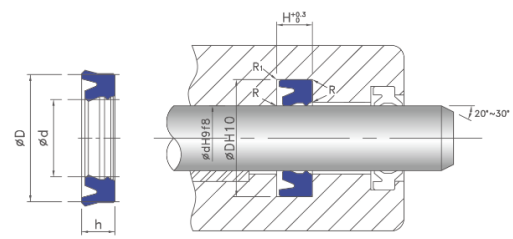

$R \leq 0.3, R1 \leq 0.5$
活塞杆表面应作 $0.8 \sim 1.6 \mu m R_{max}$ ($0.2 \sim 0.4 \mu m Ra$) 的抛光。

Type	$\varnothing d$	$\varnothing D$	h	H
D-3	8	20	8	9
	13	20	5	6
	15	25	9	10
	16	22	4	4.5
	16	22	5	6
	18	24	8	9
	18	25	5	6
	18	26	8	9
	18	28	8	9
	20	28	5.7	6.3
	20	30	8	9
	22	28	4.5	6.3
	22	30	5.7	6.3
	22	32	7	8
	25	33	6.3	7
	25	33	6.8	7.5
	25	35	7	8
	25	35	7.3	8
	25	35	8	9
	25	35	10	11
	25.4	31.75	5.69	6.35
	26	36	10	11
	28	34	3.4	4
	28	36	5.6	6.3
	28	38	7.3	8
	28	40	6	7
	30	36	6.3	7
	30	37	5	6

Type	$\varnothing d$	$\varnothing D$	h	H
D-3	30	38	5.7	6.3
	30	38	6.3	7
	30	38	8	9
	30	40	6	7
	30	40	7.3	8
	30	40	8	9
	30	40	9	10
	30	40	10	11
	30	50	11	12
	32	40	6	7
	32	40	7.7	9
	32	42	5.7	6.3
	32	47	10	11
	35	43	8.3	9
	35	45	6	7
	35	45	7	8
	35	45	10	11
	35	51	9	10
	35.5	45	6	7
	36	44	5.7	6.3
	36	46	7.3	8
	37	47	8	9
	37	47	10	11
	38	48	8	9
	38	48	10	11
	38	58	10	11
	40	48	5.7	6.3
	40	50	7.3	8

活塞杆专用密封件

Type	Ø d	Ø D	h	H
D-3	40	50	8	9
	40	50	10	11
	40	52.75	8	9
	40	55	9	10
	40	55	10	11
	40	60	12	13
	42	50	5.7	6.3
	45	53	7	8
	45	55	7	8
	45	55	7.3	8
	45	55	10	11
	45	60	10	11
	45	60	11.4	12.5
	50	58	8	9
	50	60	7.3	8
	50	60	8	9
	50	60	9	10
	50	60	10	11
	50	65	9	10
	50	65	10.9	12
	50	65	11.4	12.5
	52	62	10	11
	55	63	12	13
	55	65	6	7
	55	65	10	11
	55	65	12	13
	55	70	10	11
	55	70	11.4	12.5
	56	66	7.3	8
	56	71	12.5	13.5
	57	63	8	9
	57	67	8	9
	60	68	8	9
	60	68	13.5	14.5
	60	68	14.5	15.5
	60	70	7.3	8

Type	Ø d	Ø D	h	H
D-3	60	70	10	11
	60	70	12	13
	60	72	9	10
	60	75	8	9
	60	78	10	11
	63	73	12	13
	63	73	13	14
	63	75	11.4	12.5
	63	78	10	11
	63	78	11.4	12.5
	63	78	12.5	13.5
	65	75	7	8
	65	75	11.5	12.5
	65	77	9	10
	70	80	12	13
	70	85	9	10
	70	85	11.4	12.5
	75	83	12	13
	75	90	10	11
	75	95	12.5	13.5
	78	86	13.5	14.5
	78	86	14.5	15.5
	78	88	14	15
	80	88	8	9
	80	88	11.5	12.5
	80	90	12	13
	80	95	11.4	12.5
	80	95	11.8	13
	85	93	11.5	12.5
	90	98	8.5	9.5
	90	98	11.5	12.5
	90	100	10.5	11.5
	90	105	11.4	12.5
	92	102	7.3	8
	95	103	11.5	12.5
	97	105	11.5	12.5

活塞杆专用密封件

Type	Ø d	Ø D	h	H
D-3	97	105	13.5	14.5
	97	105	14.5	15.5
	99	109	8	9
	100	108	11.5	12.5
	100	110	15	16
	100	115	11.8	13
	100	118	6.3	7
	100	120	15	16
	100	120	16	17
	105	113	11	12
	110	118	11.5	12.5
	110	120	11.5	12.5
	110	130	15	16
	118	126	13.5	14.5
	118	133	9	10
	120	128	6.3	7
	120	128	8	9
	120	130	8	9
	120	130	11.5	12.5
	120	130	13.5	14.5
	120	130	11.5	12.5
	120	130	15	16
	120	140	13	14
	125	145	12	13
	125	145	13	14
	130	145	12	13
	135	143	11.5	12.5
	135	145	11.5	12.5
	140	150	11.5	12.5
	140	150	15	16
	141	150	8	9
	143	151	13.5	14.5
	150	160	11.5	12.5
	150	160	14.5	15.5
	152	160	11.5	12.5
	160	168	11.5	12.5

Type	Ø d	Ø D	h	H
D-3	160	170	11.5	12.5
	160	170	15	16
	160	180	11.5	12.5
	162	172	8	9
	171	179	11.5	12.5
	171	179	13.5	14.5
	172	180	14	15
	180	190	11.5	12.5
	205	215	15	16
	210	225	14	15
	220	250	18	19
	222	234	12	13

活塞杆专用密封件

Type	Ø d	Ø D	h	H
D-3"	1/2	3/4	3/16	0.207
	1/2	7/8	1/4	0.275
	3/4	1	1/4	0.275
	3/4	1	1/8	0.138
	5/8	7/8	1/4	0.275
	5/8	7/8	3/16	0.207
	5/8	1 1/8	1/4	0.275
	7/8	1 1/8	1/4	0.275
	1	1 1/2	1/4	0.275
	1	1 1/2	3/8	0.413
	1	1 1/4	1/4	0.275
	1	1 3/8	1/4	0.275
	1	1 3/8	5/16	0.344
	1 1/2	1 3/4	1/4	0.275
	1 1/2	1 7/8	1/4	0.275
	1 1/2	1 7/8	3/16	0.207
	1 1/2	1 7/8	3/8	0.413
	1 1/2	1 7/8	5/16	0.344
	1 1/2	2	1/4	0.275
	1 1/2	2	3/8	0.413
	1 1/2	2	5/16	0.344
	1 1/2	2 1/8	3/8	0.413
	1 1/4	1 1/2	1/4	0.275
	1 1/4	1 1/2	3/16	0.207
	1 1/4	1 1/2	5/16	0.344
	1 1/4	1 3/4	3/8	0.413
	1 1/4	1 5/8	1/4	0.275
	1 1/4	1 5/8	3/16	0.207
	1 1/4	1 5/8	5/16	0.344
	1 1/4	2	1/4	0.275
	1 1/8	1 1/2	5/16	0.344
	1 1/8	1 3/8	3/16	0.207
	1 3/4	2	1/4	0.275
	1 3/4	2 1/2	7/16	0.481
	1 3/4	2 1/4	1/4	0.275
	1 3/4	2 1/4	3/8	0.413

Type	Ø d	Ø D	h	H
D-3"	1 3/4	2 1/8	1/4	0.275
	1 3/4	2 1/8	3/16	0.207
	1 3/4	2 1/8	3/8	0.413
	1 3/4	2 1/8	5/16	0.344
	1 3/4	2 1/8	25/64	0.43
	1 3/8	1 3/4	5/16	0.344
	1 3/8	1 5/8	1/4	0.275
	1 3/8	1 7/8	3/8	0.413
	1 3/8	2	3/8	0.413
	1 5/8	1 7/8	1/4	0.275
	1 5/8	2	5/16	0.344
	1 7/8	2 1/4	3/8	0.413
	2	2 1/2	3/8	0.413
	2	2 1/2	5/16	0.344
	2	2 1/4	1/4	0.275
	2	2 3/8	3/16	0.207
	2	2 3/8	3/8	0.207
	2	2 3/8	5/16	0.344
	2	2 5/8	1/2	0.55
	2	2 5/8	5/16	0.344
	2 1/2	2 7/8	3/8	0.413
	2 1/2	3	3/8	0.413
	2 1/2	3 1/4	5/8	0.688
	2 1/4	2 3/4	3/8	0.413
	2 1/4	2 11/16	3/8	0.413
	2 1/4	3	1/2	0.55
	2 3/4	3 1/2	5/8	0.688
	2 3/4	3 1/4	3/8	0.413
	2 3/4	3 1/8	3/8	0.413
	2 5/8	3	3/8	0.413
	2 7/8	3 1/4	5/16	0.344
	3	3 1/2	3/8	0.413
	3	3 5/8	1/2	0.55
	3 1/2	4	3/8	0.413
	3 1/4	3 3/4	3/8	0.413
	3 1/4	3 5/8	3/8	0.413

活塞杆专用密封件

[illegible][illegible]