


活塞及活塞杆专用密封件

D-4 Type

材质：TPU / 8L953
硬度：93 Shore A
工作温度：-20°C ~ 100°C

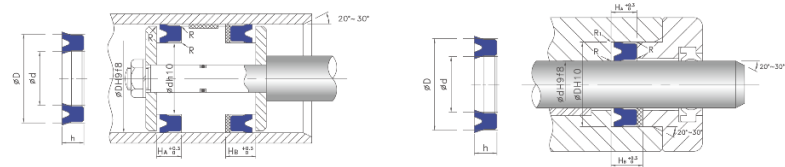

$R \leq 0.3$
油缸内表面应作 $0.4 \sim 3.2 \mu\text{mRa}$ ($0.1 \sim 0.8 \mu\text{mRa}$)
的研磨或抛光。

$R \leq 0.3, R1 \leq 0.5$
活塞杆表面应作 $0.8 \sim 1.6 \mu\text{mRa}$ ($0.2 \sim 0.4 \mu\text{mRa}$)
的抛光。

Type	Ø d	Ø D	h	HA
D-4	5	12	5	6
	11.2	17.2	11	12
	12	18	6	7
	14	22	11	12
	15.8	20.8	3	4
	115	130	12	13

Type	Ø d	Ø D	h	HA

活塞及活塞杆专用密封件

[illegible][illegible]