


往复用防尘密封件

DH-03 Type

材质：TPU / 8L953
硬度：93 Shore A
工作温度：-20℃ ~ 100℃

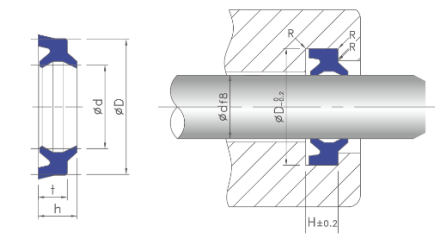

R ≤ 0.3
活塞杆表面应作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的抛光。

Type	Ø d	Ø D	t	h	H
DH-03	8	16	4.7	5.9	5.2
	10	16	3.6	4.8	4
	12	18	3.6	4.8	4
	12.5	20.5	4.5	6	5
	13	20	3.6	4.8	4
	13	20	5	6.5	6
	14	20	3.6	4.8	4
	16	22	3.6	4.8	4
	16	24	4.5	6	5
	18	26	4.5	6	5
	20	26	3.6	4.8	4
	20	28	4.5	6	5
	22	30	4.5	6	5
	22.4	30.4	4.5	6	5
	25	31	3.6	4.8	4
	25	33	4.5	6	5
	26	34	4.5	5.8	5
	28	36	4.5	5.8	5
	28	36	4.5	6	5
	30	38	5	6.5	6
	30	40	7	10	8
	32	40	4.5	5.8	5
	35	43	5	6.5	6
	35	45	4.6	8	5
	35.5	43.5	5	6.5	6
	36	44	4.5	5.8	5
	40	48	5	6.5	6
	40	50	4.5	6	5

Type	Ø d	Ø D	t	h	H
DH-03	40	50	6	7.5	7
	45	53	4.5	6.2	5
	45	53	5	6.5	6
	50	58	3.6	5	4
	50	58	5	6.5	6
	50	63	5	6.5	6
	55	63	5	6.5	6
	56	66	5.3	6.8	6
	60	68	5	6.5	6
	60	70	5.3	6.8	6
	63	71	5	6.5	6
	65	73	5	6.5	6
	70	80	5.3	6.8	6
	70	80	6	8	7
	75	85	6	8	7
	80	90	5.3	6.8	6
	80	90	6	8	7
	85	95	6	8	7
	90	100	6	8	7
	100	110	6	8	7
	100	115	7.5	9.5	8.5
	112	122	6	8	7
	125	138	7	9.5	8
	125	140	7.5	9.5	8.5

往复用防尘密封件

Type	Ø d	Ø D	t	h	H
DH-03"	1 3/4	2 1/8		9/32	0.218
	1 5/8	2		9/32	0.218

Type	Ø d	Ø D	t	h	H