


往复用防尘密封件

DH Type

材质：TPU / 8L953
硬度：93 Shore A
工作温度：-20℃ ~ 100℃

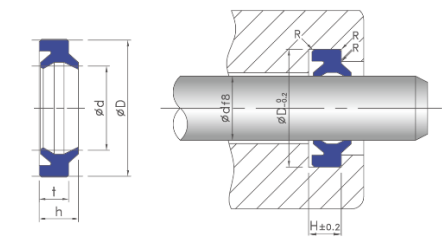

R ≤ 0.3
活塞杆表面应作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa) 的抛光。

Type	Ø d	Ø D	t	h	H
DH	11.2	19.2	4.5	6	5
	12	20	4.5	6	5
	14	22	4.5	6	5
	16	24	4.5	6	5
	18	26	4	7	4.5
	8	26	4.5	6	5
	20	27	4	5	4.5
	20	28	4	7	4.5
	20	28	4.5	6	5
	22	30	4.5	6	5
	22	31	3.7	7.6	4.2
	22.4	30.4	4.5	6	5
	23.5	31.5	4.5	6	5
	25	33	4	7	4.5
	25	33	4.5	6	5
	25	33	5	7	6
	25	35	5	7	6
	26	32	2.5	4.2	3
	28	36	4.5	6	5
	30	38	5	6.5	6
	31.5	39.5	5	6.5	6
	32	40	4	7	4.5
	32	40	5	6.5	6
	32	40.5	5	6.5	6
	33	45	5	7	6
	35	43	4	8	4.5
	35	43	5	6.5	6
	35	43	5	7	6

Type	Ø d	Ø D	t	h	H
DH	35	43.5	5	6.5	6
	35	44	4	6	4.5
	35.5	43.5	5	6.5	6
	38	46	5	6.5	6
	40	48	5	6.5	6
	40	50	7	9	8
	42	50	4	7	4.5
	44.5	52.5	5.5	7.5	6.5
	45	53	4	7	4.5
	45	53	5	6.5	6
	45	55	5	7	6
	45	55	7	10	8
	50	58	4	7	4.5
	50	58	5	6.5	6
	50	60	5	7	6
	53	61	5	6.5	6
	55	63	4	7	4.5
	55	63	5	6.5	6
	55	65	5	7	6
	56	64	5	6.5	6
	60	68	5	6.5	6
	60	70	5	7	6
	60	70	6.3	7.8	7
	61	69	5	7	6
	63	71	5	6.5	6
	65	73	4	7	4.5
	65	73	5	6.5	6
	65	75	5	7	6

往复用防尘密封件

Type	Ø d	Ø D	t	h	H
DH	67	75	5	6.5	6
	69	83	5	7	6
	70	80	5	7	6
	70	80	6	8	7
	71	81	6	8	7
	75	85	6	8	7
	80	88	4	7	4.5
	80	90	5.3	6.8	6
	80	90	6	8	7
	80	92	7	12	8
	85	95	6	8	7
	85	97	5	7	6
	90	99	5	7	6
	90	100	6	8	7
	90	102	7	12	8
	95	103	4	7	4.5
	95	105	6	8	7
	98	108	6	8	7
	100	110	6	8	7
	104.5	117	5	8.5	6
	105	113	5	7	6
	105	115	6	8	7
	106	116	6	8	7
	107	117	5	8.5	6
	110	120	6	8	7
	112	122	6	8	7
	115	125	6	8	7
	120	129	5	7	6
	120	130	6	8	7
	120	130	7	10	8
	120	133	7	9.5	8
	120	136	9	12	10
	125	138	7	9.5	8
	130	143	7	9.5	8
	132	145	7	9.5	8
	136	149	7	9.5	8

Type	Ø d	Ø D	t	h	H
DH	140	153	7	9.5	8
	140	157	6	10	7
	145	158	7	9.5	8
	150	163	7	9.5	8
	155	168	7	9.5	8
	160	173	7	9.5	8
	160	174	7	9.5	8
	165	178	7	9.5	8
	165	179	7	9.5	8
	170	183	7	9.5	8
	175	187	7	12	8
	180	193	7	9.5	8
	180	194	7	9.5	8
	190	203	7	9.5	8
	200	213	7	9.5	8
	200	214	7	9.5	8
	204	218	7	9.5	8
	205	215	7	9.5	8
	210	223	7	9.5	8
	220	233	7	9.5	8
	230	244	7	9.5	8
	240	253	7	9.5	8
	250	263	7	9.5	8

往复用防尘密封件

[illegible][illegible]