


往复用金属骨架防尘密封件

ME-1N Type

材质：TPU / 8L95+SPCC
硬度：95 Shore A
工作温度：-20℃ ~ 100℃

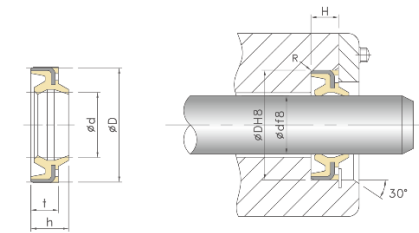

$R \leq 0.3$
活塞杆表面应作 $0.8 \sim 1.6 \mu\text{mRmax}$ ($0.2 \sim 0.4 \mu\text{mRa}$) 的抛光。

Type	ϕd	ϕD	t	h	H
ME-1N	25	37	6	9	6
	30	42	6	9	6
	35	47	7	10	7
	40	52	7	10	7
	45	57	7	10	7
	50	62	7	10	7
	50	62	8	12	8
	55	69	8	12	8
	60	74	8	12	8
	65	79	8	12	8
	70	84	8	12	8
	75	89	8	12	8
	80	94	8	12	8
	85	99	8	12	8
	90	104	8	12	8
	95	109	8	12	8
	100	114	8	12	8
	105	121	9	12.5	9
	110	126	9	12.5	9
	115	131	9	12.5	9
	120	136	9	12.5	9
	125	141	9	12.5	9
	130	146	9	12.5	9
	135	150	8	11	8
	140	160	10	14.5	10
	150	170	10	14.5	10
	60	180	10	14.5	10
	165	185	10	14.5	10

Type	ϕd	ϕD	ts	h	H
ME-1N	170	190	10	14.5	10
	175	190	10	14.5	10