


往复用金属骨架防尘密封件

ME-1 Type

材质：TPU / 8L95+SPCC  
硬度：95 Shore A  
工作温度：-20℃ ~ 100℃

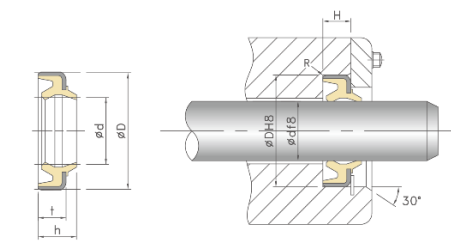

R ≤ 0.3  
活塞杆表面应作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的抛光。

| Type | Ø d | Ø D | t | h  | H |
|------|-----|-----|---|----|---|
| ME-1 | 10  | 20  | 5 | 7  | 5 |
|      | 16  | 26  | 5 | 7  | 5 |
|      | 18  | 30  | 6 | 9  | 6 |
|      | 19  | 26  | 5 | 7  | 5 |
|      | 20  | 32  | 6 | 9  | 6 |
|      | 22  | 32  | 6 | 9  | 6 |
|      | 22  | 34  | 6 | 9  | 6 |
|      | 25  | 37  | 6 | 9  | 6 |
|      | 30  | 42  | 6 | 9  | 6 |
|      | 32  | 45  | 7 | 10 | 7 |
|      | 32  | 52  | 8 | 11 | 8 |
|      | 34  | 46  | 7 | 10 | 7 |
|      | 35  | 47  | 7 | 10 | 7 |
|      | 35  | 55  | 7 | 10 | 7 |
|      | 40  | 50  | 7 | 10 | 7 |
|      | 40  | 52  | 7 | 10 | 7 |
|      | 40  | 60  | 7 | 10 | 7 |
|      | 45  | 55  | 7 | 10 | 7 |
|      | 45  | 57  | 7 | 10 | 7 |
|      | 45  | 65  | 7 | 10 | 7 |
|      | 50  | 60  | 7 | 10 | 7 |
|      | 50  | 62  | 7 | 10 | 7 |
|      | 50  | 65  | 7 | 10 | 7 |
|      | 52  | 62  | 7 | 10 | 7 |
|      | 55  | 65  | 7 | 10 | 7 |
|      | 55  | 69  | 8 | 11 | 8 |
|      | 55  | 75  | 7 | 10 | 7 |
|      | 60  | 70  | 5 | 7  | 5 |

| Type | Ø d | Ø D | t  | h  | H  |
|------|-----|-----|----|----|----|
| ME-1 | 60  | 70  | 7  | 10 | 7  |
|      | 60  | 74  | 8  | 11 | 8  |
|      | 63  | 73  | 7  | 11 | 7  |
|      | 65  | 79  | 8  | 11 | 8  |
|      | 65  | 85  | 7  | 10 | 7  |
|      | 70  | 80  | 7  | 10 | 7  |
|      | 70  | 82  | 7  | 10 | 7  |
|      | 70  | 84  | 8  | 11 | 8  |
|      | 70  | 85  | 7  | 10 | 7  |
|      | 75  | 89  | 8  | 11 | 8  |
|      | 75  | 95  | 7  | 10 | 7  |
|      | 80  | 90  | 7  | 10 | 7  |
|      | 80  | 94  | 8  | 11 | 8  |
|      | 85  | 95  | 7  | 10 | 7  |
|      | 85  | 99  | 8  | 11 | 8  |
|      | 90  | 104 | 8  | 11 | 8  |
|      | 95  | 109 | 8  | 11 | 8  |
|      | 100 | 114 | 8  | 11 | 8  |
|      | 105 | 121 | 9  | 12 | 9  |
|      | 110 | 126 | 9  | 12 | 9  |
|      | 115 | 131 | 9  | 12 | 9  |
|      | 120 | 136 | 9  | 12 | 9  |
|      | 125 | 140 | 9  | 12 | 9  |
|      | 125 | 141 | 9  | 12 | 9  |
|      | 130 | 146 | 9  | 12 | 9  |
|      | 140 | 160 | 10 | 14 | 10 |
|      | 150 | 170 | 10 | 14 | 10 |
|      | 160 | 180 | 10 | 14 | 10 |

## 往复用金属骨架防尘密封件

[illegible][illegible]