


往复用金属骨架防尘密封件

ME-2 Type

材质：TPU / 8L95+SPCC
硬度：95 Shore A
工作温度：-20℃ ~ 100℃

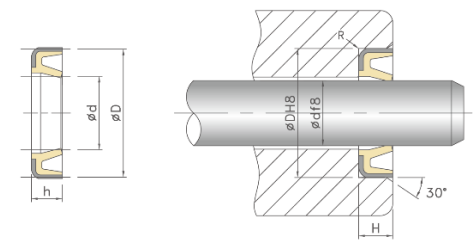

R ≤ 0.3
活塞杆表面应作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa) 的抛光。

Type	Ø d	Ø D	h	H
ME-2	19	27	4.5	4.5
	20	28	5	5
	25	32	5	5
	25	32	7	7
	25	38	7.5	7.5
	28	42	7	7
	30	40	3.2	3.2
	30	40	4	4
	30	42	7	7
	30	43	7.5	7.5
	35	45	3.2	3.2
	35	47	7	7
	36	46	7	7
	38	57	9.5	9.5
	40	50	3.2	3.2
	40	50	4	4
	40	50	5	5
	40	52	7	7
	45	55	3.2	3.2
	45	57	7	7
	50	60	9	9
	50	58	5	5
	50	60	3.2	3.2
	50	60	5	5
	50	60	7	7
	50	62	7	7
	50	64	8	8
	50	65	7	7

Type	Ø d	Ø D	h	H
ME-2	55	65	3.2	3.2
	55	65	5	5
	55	68	6	6
	55	69	8	8
	55	70	7	7
	56	68	7	7
	60	70	5	5
	60	70	7	7
	60	70	8	8
	60	73	8	8
	60	74	8	8
	60	75	7	7
	60	75	8	8
	63	78	9	9
	65	75	5	5
	65	75	6	6
	65	75	7	7
	65	79	8	8
	65	80	7	7
	70	80	4	4
	70	80	7	7
	70	84	8	8
	70	85	7	7
	75	89	8	8
	80	90	7	7
	80	93	8	8
	80	94	8	8
	80	95	7	7

往复用金属骨架防尘密封件

Type	Ø d	Ø D	h	H
ME-2	80	100	7	7
	80	100	10	10
	85	99	8	8
	90	100	5	5
	90	100	7	7
	90	104	8	8
	90	110	4	4
	90	110	7	7
	95	109	8	8
	95	110	4	4
	95	110	7	7
	100	110	7	7
	100	114	8	8
	100	115	7	7
	100	115	9	9
	105	115	7	7
	105	120	8	8
	110	125	4	4
	110	125	9	9
	110	126	9	9
	120	130	7	7
	120	135	7	7
	120	135	8	8
	120	136	9	9
	120	140	10	10
	120	148	8	8
	130	145	7.5	7.5
	130	146	9	9
	130	150	10	10
	130	150	11	11
	130	154	8	8
	140	160	10	10
	140	164	8	8
	150	165	7	7
	160	175	7	7
	160	184	8	8

Type	Ø d	Ø D	h	H

往复用金属骨架防尘密封件

Type	Ø d	Ø D	h	H
ME-2"	3/4	1	1/8	0.125
	3/4	1 1/4	1/4	0.25
	5/8	1 1/8	5/16	0.313
	7/8	1 1/8	5/32	0.156
	7/8	1 3/8	5/16	0.313
	1	1 1/2	5/16	0.313
	1	1 1/4	5/16	0.313
	1	1 3/8	3/16	0.187
	1 1/2	1 7/8	1/4	0.25
	1 1/2	1 7/8	3/16	0.187
	1 1/2	2	1/4	0.25
	1 1/2	2	3/8	0.375
	1 1/2	2	5/16	0.313
	1 1/2	2 1/4	3/8	0.375
	1 1/2	2 1/4	5/16	0.313
	1 1/2	2 1/8	1/4	0.25
	1 1/2	2 1/8	5/16	0.313
	1 1/4	1 3/4	1/4	0.25
	1 1/4	1 3/4	5/16	0.313
	1 1/4	1 5/8	1/8	0.125
	1 1/4	1 5/8	3/16	0.187
	1 1/8	1 1/2	3/16	0.187
	1 1/8	1 5/8	5/16	0.313
	1 3/4	2 1/2	3/8	0.375
	1 3/4	2 1/4	1/4	0.25
	1 3/4	2 1/4	3/16	0.187
	1 3/4	2 1/4	5/16	0.313
	1 3/4	2 1/8	1/8	0.125
	1 3/4	2 3/4	3/8	0.375
	1 3/4	2 7/16	3/8	0.375
	1 3/8	1 7/8	5/16	0.313
	1 5/8	2 1/8	1/4	0.25
	1 7/8	2 1/2	3/8	0.375
	1 7/8	2 3/8	5/16	0.313
	1 7/8	2 9/16	3/8	0.375
	2	2 1/2	1/4	0.25

Type	Ø d	Ø D	h	H
ME-2"	2	2 1/2	3/16	0.187
	2	2 1/2	5/16	0.313
	2	2 3/4	1/4	0.25
	2	2 3/4	3/8	0.375
	2	2 3/8	1/4	0.25
	2	2 3/8	3/16	0.187
	2	2 5/8	1/4	0.25
	2	2 11/16	3/8	0.375
	2 1/2	2 7/8	3/16	0.187
	2 1/2	3	1/4	0.25
	2 1/2	3	3/16	0.187
	2 1/2	3	5/16	0.313
	2 1/2	3 1/4	1/4	0.25
	2 1/2	3 1/4	3/8	0.375
	2 1/2	3 1/4	5/16	0.313
	2 1/2	3 1/8	1/4	0.25
	2 1/2	3 9/16	5/16	0.313
	2 1/4	2 3/4	1/4	0.25
	2 1/4	2 3/4	3/16	0.187
	2 1/4	2 3/4	5/16	0.313
	2 1/4	2 7/8	1/4	0.25
	2 1/4	3	1/4	0.25
	2 1/4	3	3/8	0.375
	2 1/4	3	5/16	0.313
	2 1/4	3 1/4	1/2	0.5
	2 1/8	2 1/2	1/8	0.125
	2 1/8	2 1/2	3/16	0.187
	2 1/8	2 3/4	5/16	0.313
	2 1/8	2 5/8	5/16	0.313
	2 1/8	2 7/8	3/8	0.375
	2 1/8	2 7/8	7/16	0.438
	2 3/4	3 1/2	3/8	0.375
	2 3/4	3 1/4	3/8	0.375
	2 3/4	3 1/4	5/16	0.313
	2 3/4	3 1/8	3/16	0.187
	2 3/4	3 3/4	1/2	0.5

往复用金属骨架防尘密封件

Type	Ø d	Ø D	h	H
ME-2"	2 3/8	2 7/8	1/4	0.25
	2 3/8	2 7/8	5/16	0.313
	2 3/8	3 1/8	3/8	0.375
	2 5/16	3 1/8	3/8	0.375
	2 5/8	3 1/4	3/8	0.375
	2 5/8	3 1/8	1/4	0.25
	2 7/8	3 1/2	1/4	0.25
	3	3 1/2	5/16	0.313
	3	3 3/4	1/2	0.5
	3	3 3/4	1/4	0.25
	3	3 3/4	3/8	0.375
	3	3 3/4	5/16	0.313
	3	3 3/8	3/16	0.187
	3	4	1/2	0.5
	3 1/2	3 3/4	5/16	0.313
	3 1/2	4	1/2	0.5
	3 1/2	4	5/16	0.313
	3 1/2	4 1/2	1/2	0.5
	3 1/2	4 1/4	1/4	0.25
	3 1/2	4 1/4	5/16	0.313
	3 1/2	4 1/8	1/4	0.25
	3 1/2	4 1/8	5/16	0.313
	3 1/4	3 3/4	1/4	0.25
	3 1/4	3 3/4	3/8	0.375
	3 1/4	3 3/4	5/16	0.313
	3 1/4	3 7/8	5/16	0.313
	3 1/4	4	1/4	0.25
	3 1/4	4 1/4	1/2	0.5
	3 1/8	3 3/4	3/8	0.375
	3 1/8	3 3/4	5/16	0.313
	3 1/8	3 5/8	3/16	0.187
	3 3/4	4 1/2	5/16	0.313
	3 3/4	4 3/4	1/2	0.5
	3 3/4	4 3/8	5/16	0.313
	3 3/8	3 3/4	3/8	0.375
	3 3/8	4	5/16	0.313

Type	Ø d	Ø D	h	H
ME-2"	3 3/8	4 3/8	3/8	0.375
	3 5/8	4 1/2	1/2	0.5
	4	4 1/2	1/4	0.25
	4	4 3/4	5/16	0.313
	4	4 5/8	5/16	0.313
	4	5	1/2	0.5
	4 1/4	4 7/8	5/16	0.313
	4 1/2	5	1/4	0.25
	4 1/2	5 1/2	1/2	0.5
	4 1/2	5 1/4	5/16	0.313
	4 1/2	5 1/8	5/16	0.313
	4 1/4	5	1/2	0.5
	4 1/4	5 1/4	1/2	0.5
	4 1/8	4 3/4	5/16	0.313
	4 3/4	5 3/4	1/2	0.5
	4 3/4	5 3/4	3/8	0.375
	4 3/4	5 3/8	5/16	0.313
	4 3/8	5	5/16	0.313
	4 3/8	5 3/8	3/8	0.375
	5	5 3/4	5/16	0.313
	5	5 5/8	5/16	0.313
	5 1/2	6 1/4	5/16	0.313
	5 1/2	6 1/8	3/8	0.375
	5 1/2	7 3/8	7/16	0.438
	5 1/4	6	5/16	0.313
	5 3/4	6 3/4	1/2	0.5
	5 3/4	6 3/8	3/8	0.375
	6	6 5/8	3/8	0.375
	6 1/2	7 1/4	5/16	0.313
	6 3/4	7 3/8	3/8	0.375
	7	7 3/4	5/16	0.313
	9	9 3/4	9/16	0.563